

Soil Tunnel Take Down Instructions

*Note this will take 2-3 people

1. Turn off the blower and take out of the tube. Also open zipper vents in the back all the way open.



2. Allow the air to escape from the tunnel for approximately 20 minutes to allow for maximum deflation.



3. Once the tunnel has deflated for 20 minutes, fold both of the bottoms towards the middle, as seen in the pictures below. If necessary wait 5-10 minutes for more air to leave the tunnel.




- Continue to fold ONE side of the tunnel so that you end up with a long roll. Please see pictures below for reference.



(This is what it should look like after this step is completed)

- Now, start to roll the end where the blower was. This is important because the open zippers are at the opposite end allowing any remaining air to get out.

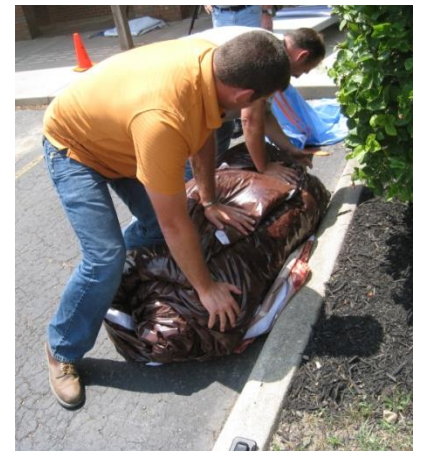

- Wrap the black straps around the soil tunnel to hold it into the rolled up shape.
- Next, put the now rolled up tunnel onto the cart.
- Push the cart into the trailer on the right side if looking into the trailer from the back.



- Secure the cart with the soil tunnel on it using the tow straps on the wall and floor in the trailer.



- Finally, place all remaining items, including but not limited to: the lights, extension cords, generator, blower, gas can, weights, and ladders.



Thank you for your cooperation and we hope that you enjoyed your experience with the inflatable soil tunnel! If you have any further questions please call Delaware SWCD at (740) 368-1921.



Delaware Soil & Water
Conservation District
Helping You Help the Land